

FAMV-6A26SLAB/CM (BK)

CAT6A Ethernet high flexible cable

- Heat resistance★★★★
- Oil resistance★★★★
- Noise resistance★★★★
- Flame resistance★★★★
- Torsion resistance—
- Flexibility resistance—
- Drag chain★★★★★
- ※The characteristic is an aim.


> Application

- Appropriate for drag chain wiring for high-speed moving.
- CAT6A
- High flexible cable with UL, cUL at 300V 75°C.
(Category : DUZX, DUZX7, AVLV2, AVLV8)
- EtherCAT

> Features

- It passes Vertical-trai Flame Test of UL, cUL.
- Flame resisting : UL VW-1 , cUL FT1 .
- Oil, heat,flame resisting flexible PVC material is used for sheath.
- CM listing standard is acquired and it corresponds to NFPA70.
- Double shielded.

> Construction figure

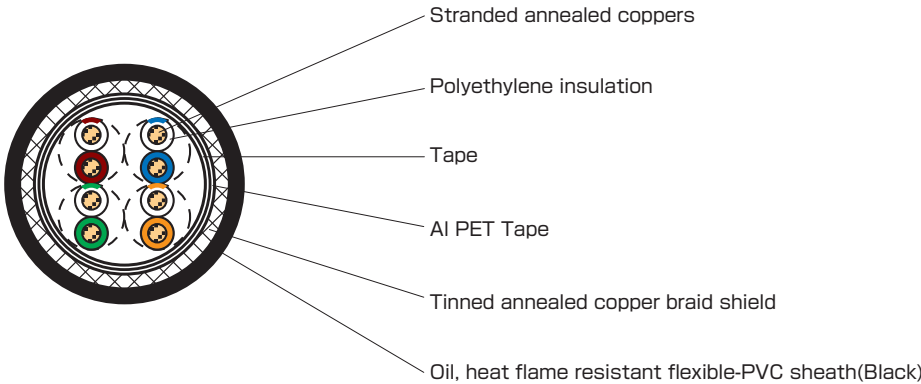

> Surface marking



> Identification

Pair number	1	2	3	4
No.1 kind line	Blue/White	Orange/White	Green/White	Brown/White
No.2 kind line	Blue	Orange	Green	Brown

※Blue/White : Blue line is marked on white insulation.

>>> Meeting standard

Certification	UL CM	cUL CM	UL AWM	cUL AWM
Applicable standard	UL 444	CSA C22.2 No.214	UL 758	CSA C22.2 No.210
Official symbol	CM	CM	UL STYLE 20276	CSA AWM II A/B
Voltage rating	300V	300V	30V	30V
Temperature rating	75°C	75°C	80°C	80°C
Conductor	UL 444	CSA C22.2 No.214	UL 758	CSA C22.2 No.210
Flame rating	Vertical-Tray Flame Test	Vertical-Tray Flame Test	VW-1	FT1



> Construction table

No. of pairs	Conductor		Polyethylene insulation		Oil,heat-resistant flexible-PVC sheath		Approx. weight (lbs/1000ft) (kg/km)	Electrical Characteristics		
	Size (AWG)	Construction (Line/mm)	Outside diameter (inch)	Outside diameter (mm)	Overall diameter approx. (inch)	Overall diameter approx. (mm)		Conductor resistance (Ω/km20°C)	Insulation resistance (MΩ.km20°C)	Electrical strength (V/1min.)
4P	26	30/0.08 (30/3.2mil)	0.035	0.9	0.252	6.4	35(52)	less than 168	more than 5,000	AC700

> Electric characteristics (High Frequency)

Electric Characteristics	Frequency (MHz)							
	1	4	16	31.25	100	200	300	500
Insertion Loss (dB/35m)	less than 2.1	less than 3.8	less than 7.5	less than 10.5	less than 19.1	less than 27.6	less than 34.3	less than 45.3
NEXT loss (dB)	more than 74.3	more than 65.3	more than 56.2	more than 51.9	more than 44.3	more than 39.8	more than 37.1	more than 33.8
PSNEXT Loss (dB)	more than 72.3	more than 63.3	more than 54.2	more than 49.9	more than 42.3	more than 37.8	more than 35.1	more than 31.8
Characteristic Impedance (Ω)	85-115							

> Standard sales length

200m