

UE/2517-SB(N) [Y/G]LF

Electronic equipment cable

Heat resistance	★★★★★
Oil resistance	★★★★★
Noise resistance	★★★★★
Flame resistance	★★★★★
Flexibility	★★★★★
non-migratory	★★★★★
Transport property	★

*The characteristic is an aim.

Certification	UL AWM	cUL AWM	CE marking
Applicable standard	UL 758	CSA C22.2 No.210	EN50525-2-51
Official symbol	UL STYLE 2517	CSA AWM II A	Equivalent of H05VV5-F
Voltage rating	300V	300V	300/500V
Temperature rating	105°C	105°C	70°C
Conductor	UL 758	CSA C22.2 No.210	EN60228
Flame rating	VW-1	FT1	EN50264-2-1




▶ Application

- Multi-cable for North America and EU.
- Shielded Electric equipment cable with UL and cUL at 300V, 105°C. (Category : AVL V2, AVL V8)
- CE marking.

▶ Feature

- Heat resistant PVC used for insulation.
- Oil, heat resistant and Flexible PVC sheath material is used.
- Flame resisting:UL VW-1, cUL FT1.


▶ Construction figure

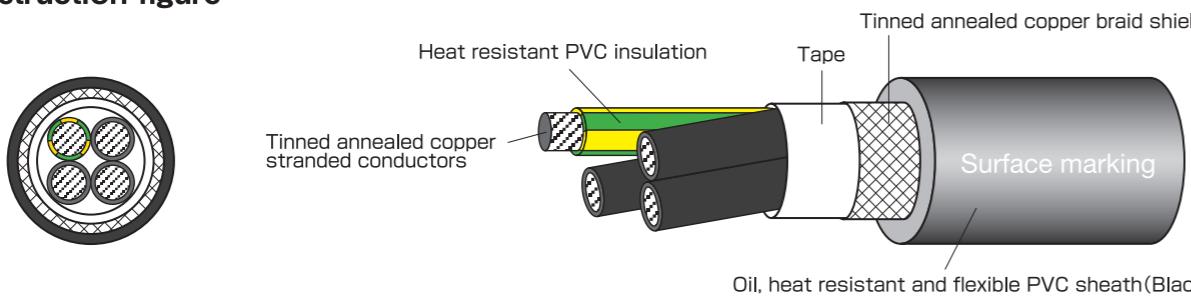

▶ Surface marking

E67647 AWM 2517 105°C 300V VW-1 TAIYO AWM IIA 105°C 300V FT1 TAIYO CE 05VV5-F 300/500V LF R15

▶ Identification

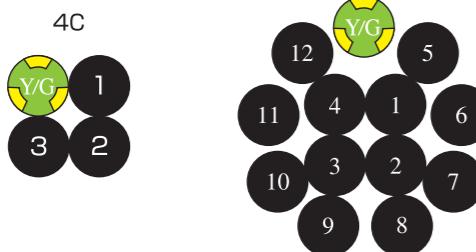

Figures in ○ indicate white numbering on black insulator.

*Y/G indicates green core with yellow stripe(30~50%).

▶ Construction table

No. of cores	Conductor		Heat resistant PVC insulation		Oil, heat - resistant flexible - PVC sheath		Approx. weight (lbs/1000ft) (kg/km)	Electrical Characteristics			Allowable ampacity (A)
	Size (AWG)	Construction (Line/mm)	Outside diameter (mm)	Outside diameter (inch)	Overall diameter approx. (inch)	Overall diameter approx. (mm)		Conductor resistance (Ω/km20°C)	Insulation resistance (MΩkm20°C)	Electric strength (V/1min.)	
3C					0.335	8.5	64(95)				15
4C	20 (0.5mm ²)	21/0.18 (21/7.1mil)	0.95 (37mil)	0.106	0.362	9.2	74(110)				13
5C					0.398	10.1	94(140)	less than 36.2	more than 10	2000	11
7C					0.461	11.7	118(175)				10
13C					0.579	14.7	185(275)				8.4
3C					0.354	9.0	74(110)				18
4C	19 (0.75mm ²)	31/0.18 (31/7.1mil)	1.2 (47mil)	0.114	0.386	9.8	87(130)				15
5C					0.417	10.6	108(160)	less than 26.7	more than 10	2000	14
7C					0.488	12.4	134(200)				12
13C					0.654	16.6	235(350)				10

*[Y/G] earth cable of an equal size.

*The examination of 2000V/5 minute besides the withstand voltage test on above mentioned UL standard and the CSA standard is applied.

*The size indicated within parenthesis in the above table, describes the appropriate size of Japanese domestic use.

▶ Allowable ampacity

- The allowable ampacity of this catalog is a value at one in the air construction and the ambient temperature 30°C.
- Allowable ampacity is calculated based on JCS0168.
- Allowable ampacity is calculated excluding grounding conductor.
- Please multiply the following correction coefficient by the ambient temperature.

● Adjustment factors(at ambient temperature)

Ambient temperature(°C)	30	40	50	60	70	80	90	100
Adjustment factors	1.00	0.93	0.86	0.77	0.68	0.58	0.45	0.26

▶ Standard sales length

100m

(Sales by short length is available for large sizes. Please contact us which sizes are available.)