

EM-ECTF/F HF

Flexible cord insulated and sheathed with polyolefin

| | |
|--------------------|------|
| Heat resistance | ★★ |
| Oil resistance | ★ |
| Noise resistance | ★ |
| Flame resistance | ★★★ |
| Flexibility | ★★ |
| non-migratory | ★★★★ |
| Transport property | ★★ |

*The characteristic is an aim.

>>> Meeting standard



| Certification | Electrical Appliance and Material Safety |
|---------------------|--------------------------------------------------------------------------------------|
| Applicable standard | Law Departmental order to determine a technical standard of the electrical equipment |
| Official symbol | Flame resistant polyolefin |
| Voltage rating | 300V |
| Temperature rating | 75°C |
| Conductor | JIS C 3102 |
| Flame rating | JIS C 3005-4.26.2-b) |


> Application

- Small electric appliances of a.c. 300V or under principally for indoor service.
- Use of halogen-free specification.
- Rated voltage:300V. Temp:75°C.

> Feature

- Non-halogen flame-resistant polyolefin for insulation and sheath.
- Halogen-free, low smoke evolution.
- Heat resistance 75 °C.
- Cold -40 °C.
- Conform to Electrical Appliance and Material Safety Law.

> Construction figure


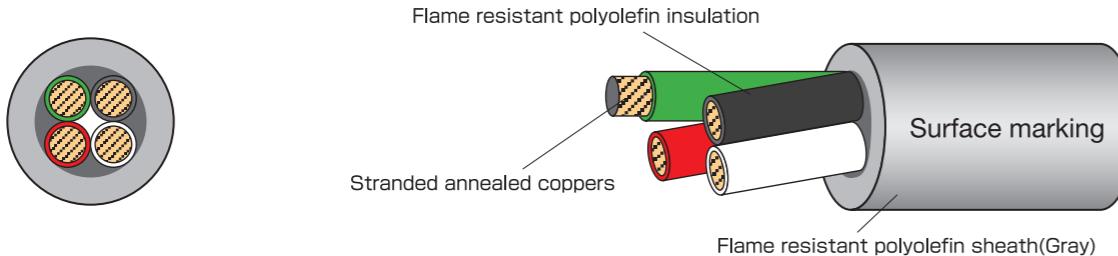


> Surface marking

○○mm² EM-ECTF/F <PS>E ◇◇ TE タイネン 製造年 HF R15 TAIYO・TEIKOKU

◇◇ : Name of the registered conformity assessment body

> Identification



> Construction table

| No. of cores | Conductor | | | Flame resistant polyolefin insulation | | Flame resistant polyolefin sheath | | Approx. weight (lbs/1000ft) (kg/km) | Electrical Characteristics | | | Allowable ampacity (A) |
|--------------|-------------------------------------|---------------------------|--------------------------|---------------------------------------|------------------------------------|-----------------------------------|------------------------------------|-------------------------------------------|---------------------------------|--------------|------|------------------------|
| | Size (AWG) (mm ²) | Construction (Line/mm) | Outside diameter (mm) | Outside diameter (inch) | Overall diameter approx. (inch) | Overall diameter approx. (mm) | Conductor resistance (Ω/km20°C) | Insulation resistance (MΩkm20°C) | Electrical strength (V/min.) | | | |
| 2C | | | | | 0.260 | 6.6 | 40 (60) | | | | | 14 |
| 3C | 0.75 | 30/0.18 (30/7.1mil) | 1.1 (43mil) | 0.091 | 2.3 | 0.276 | 7.0 | 47 (70) | less than 25.1 | more than 50 | 2000 | 12 |
| 4C | | | | | | 0.299 | 7.6 | 60 (90) | | | | 11 |
| 2C | | | | | 0.291 | 7.4 | 54 (80) | | | | | 19 |
| 3C | 1.25 | 50/0.18 (50/7.1mil) | 1.5 (59mil) | 0.106 | 2.7 | 0.307 | 7.8 | 64 (95) | less than 15.1 | more than 50 | 2000 | 16 |
| 4C | | | | | 0.335 | 8.5 | 81 (120) | | | | | 15 |
| 2C | | | | | 0.315 | 8.0 | 67 (100) | | | | | 25 |
| 3C | 2 | 37/0.26 (37/10.2mil) | 1.8 (71mil) | 0.118 | 3.0 | 0.335 | 8.5 | 81 (120) | less than 9.79 | more than 50 | 2000 | 21 |
| 4C | | | | | 0.362 | 9.2 | 101 (150) | | | | | 19 |

> Allowable ampacity

The allowable ampacity of this catalog is a value at one in the air construction and the ambient temperature 30°C.

Allowable ampacity is calculated based on JCS0168.

Please multiply the following correction coefficient by the ambient temperature.

● Adjustment factors(at ambient temperature)

| Ambient temperature(°C) | 30 | 35 | 40 | 45 | 50 | 55 | 60 |
|-------------------------|------|------|------|------|------|------|------|
| Adjustment factors | 1.00 | 0.94 | 0.88 | 0.82 | 0.75 | 0.67 | 0.58 |

> Standard sales length

100m/500m

Please contact us which sizes are available.