

# FAMV-5E26SB (BK)

## CAT5e Ethernet high flexible cable

Heat resistance ★★★  
 Oil resistance ★★★★★  
 Noise resistance ★★★★★  
 Flame resistance ★★★★★  
 Torsion resistance —  
 Flexibility resistance —  
 Cable carrier ★★★★★★  
※The characteristic is an aim.

Meeting standard



Certification	UL AWM
Applicable standard	UL 758
Official symbol	UL STYLE 20276
Voltage rating	30V
Temperature rating	80°C
Conductor	UL 758
Flame rating	VW-1


### Application

- Appropriate for cable bare wiring for high-speed moving.
- CAT5e
- High flexible cable with UL at 30V 80°C. (Category : AVL2.)

### Features

- Flame resisting : UL VW-1.
- Heat resistant Cross Linked PE used for insulation.
- Oil, heat, flame resisting flexible PVC material is used for sheath.

### Construction figure

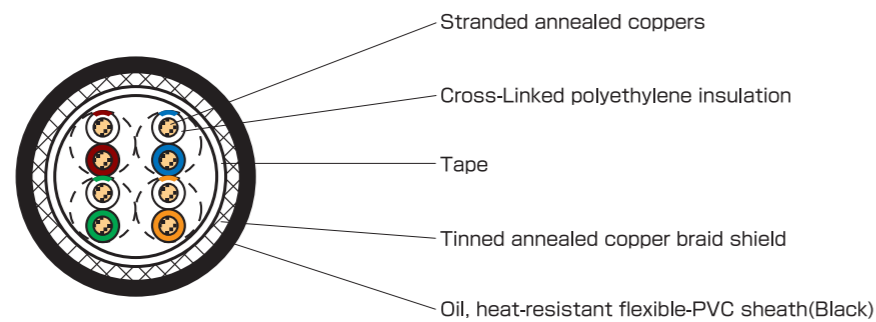

### Surface marking



### Identification

Pair number	1	2	3	4
No.1 kind line	Blue/White	Orange/White	Green/White	Brown/White
No.2 kind line	Blue	Orange	Green	Brown

※Blue/White : Blue line is marked on white insulation.

### Construction table

No. of pairs	Conductor		Cross-linked polyethylene insulation		Oil, heat-resistant flexible-PVC sheath		Approx. weight (lbs/1000ft) (kg/km)	Electrical Characteristics		
	Size (AWG)	Construction (Line/mm)	Outside diameter (inch)	Outside diameter (mm)	Overall diameter approx. (inch)	Overall diameter approx. (mm)		Conductor resistance (Ω/km20°C)	Insulation resistance (MΩkm20°C)	Electrical strength (V/1min.)
4P	26	30/0.08 (30/3.2mil)	0.035	0.9	0.252	6.4	33(49)	less than 146	more than 5,000	AC700

### Electric characteristics (High Frequency)

Electric Characteristics	Frequency (MHz)				
	1	4	16	31.25	100
Insertion Loss (dB/35m)	less than 2.0	less than 4.1	less than 8.2	less than 11.7	less than 22.0
NEXT loss (dB)	more than 65.3	more than 56.3	more than 47.2	more than 42.9	more than 35.3
PSNEXT Loss (dB)	more than 62.3	more than 53.3	more than 44.2	more than 39.9	more than 32.3
Characteristic Impedance (Ω)	85-115				

### Standard sales length

200m